



2S1 461
2SC535



2SA1029 2SC1775
2SC828A 2SC1890
2SC945 2SC1980



2SC789
2SC1061
2SC1419
2SD330





2SK68
2SK68A
2SK105

AM-FM STEREO TUNER

(KT-8155)

KT-815

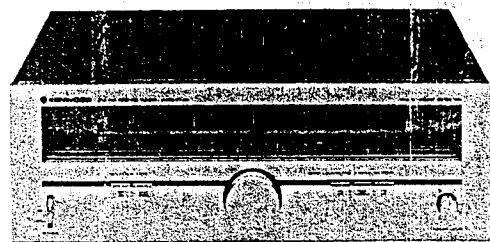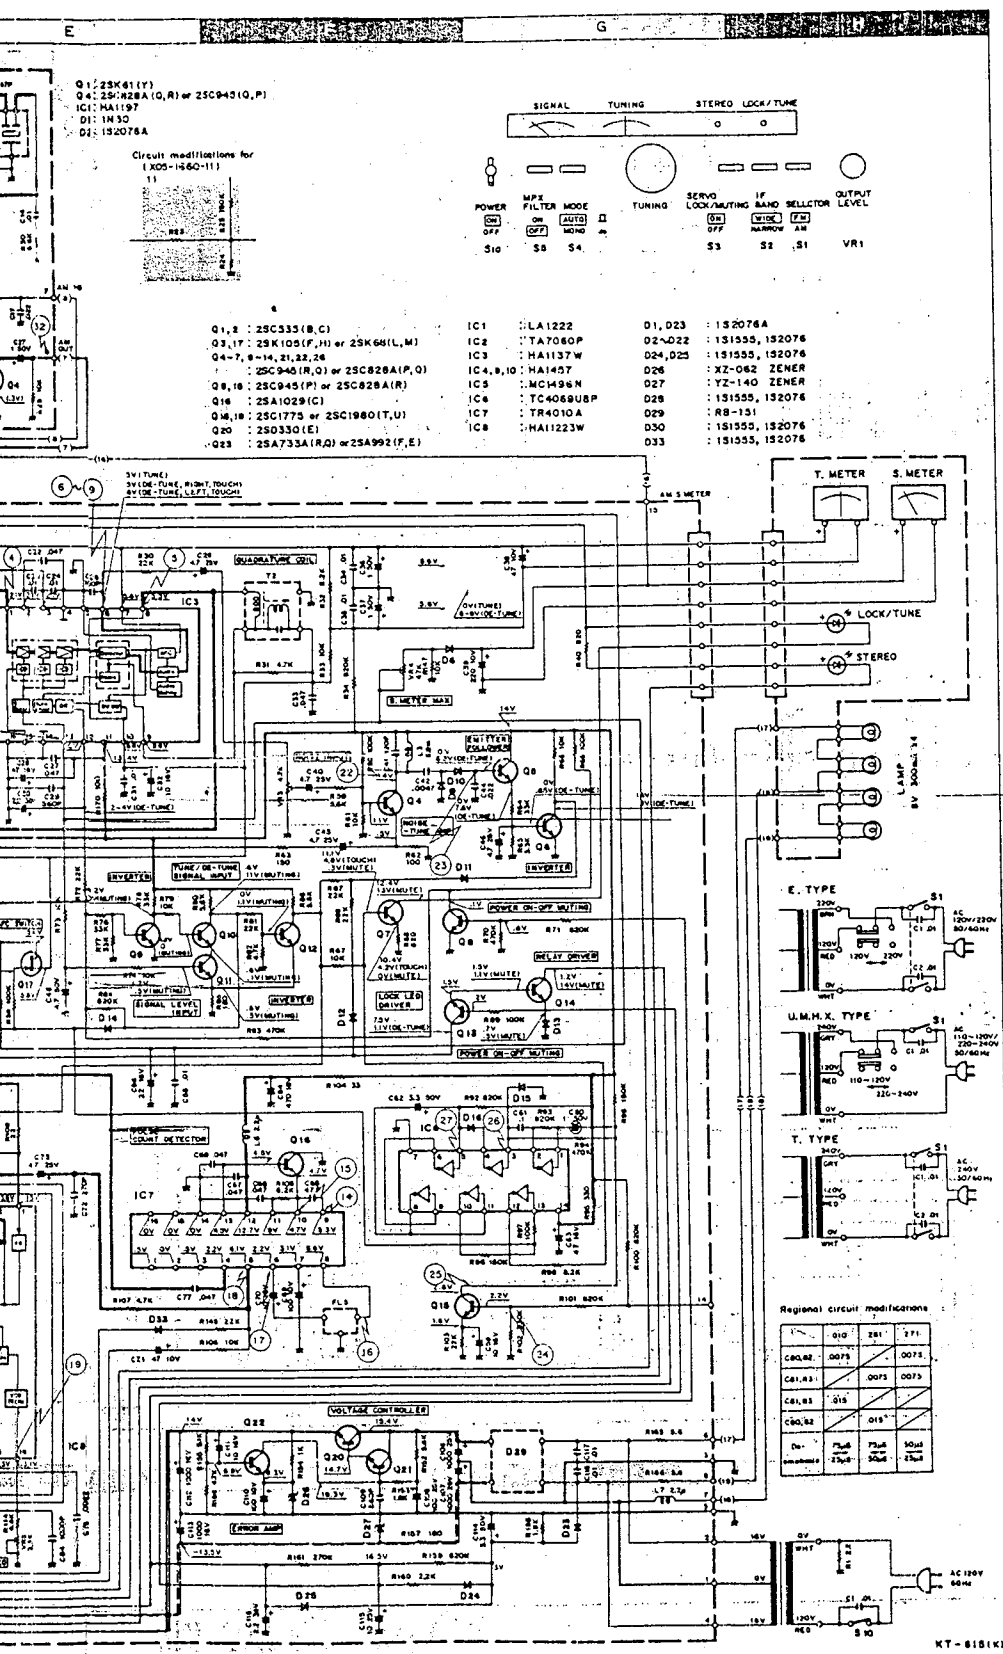

FM TUNER SECTION

Usable Sensitivity	10.3 dBf (1.8 μ V)
50 dB Quieting Sensitivity	15.8 dBf (3.4 μ V)
(Mono)	37.2 dBf (140 μ V)
(Stereo)	
Signal to Noise Ratio	84 dB
(Mono)	80 dB
(Stereo)	
Total Harmonic Distortion	
Mono at	
100 Hz	0.03%
1,000 Hz	0.04%
6,000 Hz	0.065%
15,000 Hz	0.07%
Stereo at	
50 Hz - 10,000 Hz	0.065%
100 Hz	0.07%
1,000 Hz	0.05%
6,000 Hz	0.1%
15,000 Hz	0.4%
50 Hz - 10,000 Hz	0.15%
Capture Ratio	1.0 dB
Alternate Channel Selectivity	45 dB
Stereo Separation	
50 Hz - 1,000 Hz	55 dB
50 Hz - 10,000 Hz	45 dB
15,000 Hz	40 dB
Frequency Response	30 Hz to 15,000 Hz ± 0.3 dB ± 0.5 dB
Spurious Response Ratio	120 dB
Image Response Ratio	110 dB
IF Response Ratio	105 dB
AM Suppression Ratio	65 dB
Sub-Carrier Product Ratio	20 dB
Antenna Impedance	300 ohms balanced & 75 ohms unbalanced
FM Frequency Range	88 MHz to 108 MHz
Output Level	
1,000 Hz 100% Mod.	Fixed: 0.7 V, 2.5 kohms
	Variable: 0 to 1.3 V, 1.5 kohms
Multipath Output	Vertical: 0.02 V, 1.0 kohms
	Horizontal: 0.35 V, 10 kohms




AM TUNER SECTION

Usable Sensitivity	9 μ V
Signal to Noise Ratio	55 dB
Total Harmonic Distortion	0.4%
Image Rejection	60 dB
Selectivity	38 dB
Output Level	
400 Hz 30% Mod.	Fixed: 0.2 V, 2.5 kohms
	Variable: 0 to 0.3 V, 1.5 kohms

GENERAL

Power Requirements	60 Hz 120 V (U.S.A. & Canada Model) or 50/60 Hz 110 120/220 240 V switchable
Power Consumption	20 watts
Dimensions	W 440 mm (17-10/32")
	H 153 mm (6-8/32")
	D 402 mm (15-27/32")
Weight (Net)	7.6 kg (16.7 lbs)

Note: Kunwood follows a policy of continuous advancements in development. For this reason, specifications may be changed without notice.



KT-815(K)